

CLIPS, LOOP, LABELING TAPE

CONSUMABLES



U-CLIPS KOMPO







Aluminum clips are intended for clipping meat and dairy products and other bulk products in clippable tubular nets and casings. If necessary, a string loop may be applied under the clip.







U-clips are manufactured in various sizes. They are used by KOMPO clippers as well as by clippers of other manufacturers. The choice of the clip type depends on the product to be packed and type of casings used.

Scale 1:1	Type (analog)	Width mm	Height mm	Profile mm	Scale 1:1	Type (analog)	Width mm	Height mm	Profile mm
	A1	10,5	10,0	Ø2		PCC1 (S735)	16,2	15,3	2,4 x 3,1
	A2	10,5	12,0	Ø2		PCC2 (S740)	16,2	17,8	2,4 x 3,1
	B1	14,0	12,0	Ø2,5		PCC3 (S744)	16,2	19,8	2,4 x 3,1
	B2	14,0	14,0	Ø2,5		PCC4 (S747)	16,2	21,2	2,4 x 3,1
	B3	14,0	16,0	Ø2,5		PCE1 (E210)	13,3	11,7	2,0 x 2,5
	BP1	14,0	12,0	2,4 x 2,8		PCE2 (E220)	13,3	13,6	2,0 x 2,5
	BP2	14,0	14,0	2,4 x 2,8		PCE3 (E230)	13,3	14,8	2,0 x 2,5
	BP3	14,0	16,0	2,4 x 2,8		PCE4 (E240)	13,3	15,7	2,0 x 2,5
	PCA1 (S625)	12,5	10,5	1,9 x 2,3					
	PCA2 (S628)	12,5	12,0	1,9 x 2,3					
	PCA3 (S632)	12,5	14,0	1,9 x 2,3					

- Packaging form - box
- A reel-to-reel packaging option is available on request.
- Clips may have notches on the inside for better grip of the casings on request.
- Heavy duty clips can be produced on request.

U-CLIPS KOMPO

Scale 1:1	Type (analog)	Width mm	Height mm	Profile mm
	E (G370)	18,0	14,0	Ø3
	E1 (G390)	18,0	17,0	Ø3
	E2 (G400)	18,0	20,0	Ø3
	TPX1 (G175)	18,0	15,0	Ø3
	TPX2 (G200)	14,2	17,0	Ø3
	TPX3 (G250)	14,2	19,0	Ø3

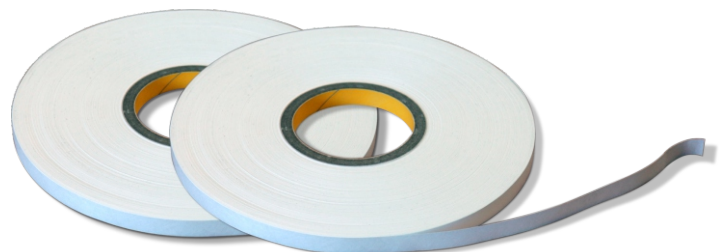
Scale 1:1	Type (analog)	Width mm	Height mm	Profile mm
	TPK1 (K100)	11,2	11,7	Ø2,3
	TPK2 (K120)	11,2	14,5	Ø2,3
	TPK3 (K150)	11,2	17,0	Ø2,3
	TPT1 (T100)	11,2	11,7	2,3 x 2,0
	TPT2 (T120)	11,2	14,0	2,3 x 2,0
	TPT3 (T150)	11,2	16,3	2,3 x 2,0

- Packaging form - box
- A reel-to-reel packaging option is available on request.
- Clips may have notches on the inside for better grip of the casings on request.
- Heavy duty clips can be produced on request.

LABELING TAPE

Used for marking an expiry date during the product clipping with the use of a labeler made by KOMPO or other manufacturers.

Name of labeling tape	Length m	Width mm	Thickness mm	The availability of perforation
«KOMPO»	200	12	0,2	-
«KOMPO-1P»	200	12	0,2	+



Continuous clips are used in automatic clippers and designed for double clipping of sausages with a caliber of 20 to 110 mm. The choice of the cliptype depends on the product to be packed and casing used. They have a groove on the edges that ensures additional rigidity and prevents from casing damaging during the clipping.




Technical specifications

Type T-H/B*S	Side groove	Quantity in spool, pieces	Packaging, pieces
15-07/5*1,5	-	6 000	60 000
15-07/5*1,75	-	6 000	60 000
15-08/5*1,5	-	5 000	50 000
15-08/5*1,75	-	5 000	50 000
15-09/5*1,5	-	5 000	50 000
15-09/5*1,75	+	5 000	50 000
18-07/5*1,75	+	4 000	40 000
18-09/5*1,75	-	4 000	40 000
18-09/5*2,0	-	4 000	40 000
18-09/5*2,0	+	4 000	40 000
18-11/5*2,0	-	3 000	30 000
18-11/5*2,0	+	3 000	30 000
18-11/5*2,2	-	3 000	30 000
18-12/5*2,0	-	3 000	30 000
18-12/5*2,2	-	3 000	30 000

The clip type size consists of four T/H-BxS numbers:

- T - shows pitch
- H - shows height
- B - shows width
- S - shows thickness



ADVANTAGES:

- better clamping on all types of casings;
- less clipping effort needed;
- increased amplitude of clip clamping adjustment without damaging fragile casings;
- universal usage of casings without readjusting a clipper to a different size of clip



KOMPO clips are treated with food-grade oil and lubricants certified by the NSF (National Sanitation Foundation) during production. This protects the components against wear and tear and ensures smooth operation without shock loads or seizure. The NSF certification guarantees that physiologically safe substances have been used in the production and have passed numerous toxicological tests. NSF certification unites manufacturers of harmless materials.

String loops are used for hanging meat products on crosspieces of racks. Loops are applied under a clip on manual, semi-automatic and automatic clippers.

Loops have two versions: - individual loops for manual delivery during the clipping;
- glued on a tape for automatic delivery during the clipping.









Technical specifications

Type of loop	Pitch mm	Lenght mm	Version	Form of package	Quantity in spool, pieces	Packaging, pieces
L90	-	90	piece	packet	10 000	-
L110	-	110	piece	packet	10 000	-
L120	-	120	piece	packet	10 000	-
20/100	20	100	traversal	bobbin	3 500	21 000
22/100	21	100	traversal	bobbin	3 500	21 000
25/100	25	100	traversal	bobbin	3 500	21 000
KOMPO-02	44	110	longitudinal	bobbin	2 500	20 000
KOMPO-04	30	110	longitudinal	bobbin	5 000	20 000

Various colors available

LLC "Machine-building enterprise "KOMPO"

Republic of Belarus
224032 Brest, st. Y. Kupaly, 108 D
www.kompo.by
e-mail: kompo@kompo.by



 +375 33 911-30-30
 KOMPO_COM
 kompo_by
 kompoequipment